



**Congratulations on your purchase of a new Lemmer T-90Q with 3M™ PPS™ technology.
This container system is very convenient to use and allows spraying on any angle.**




Your T-90Q is shipped with one lid/liner already installed in the hard outer container shell, and the adaptor fitting installed on the gun. A spare liner is also included.

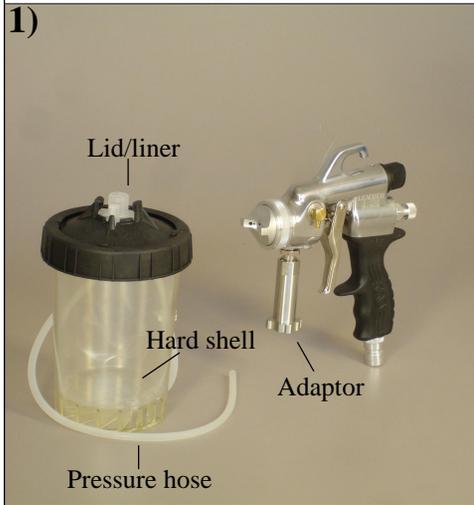

Remove the ring and cover of container shell, and the lid for the liner. Fill liner with product, then re-install lid, cover and ring. Tighten securely. Do not use the shell without a liner!

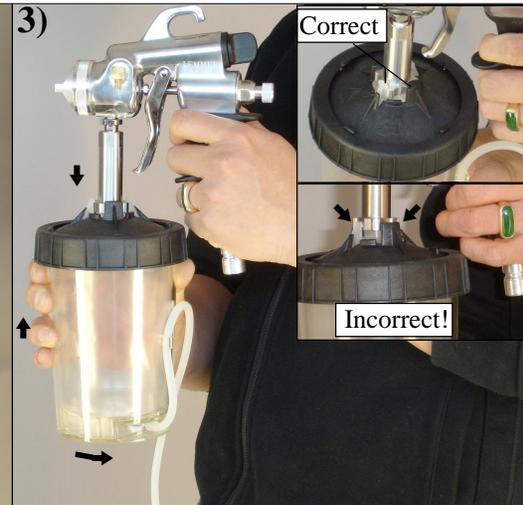


Connect the container assembly to the gun as shown, ensuring the locks are properly engaged per inset photos. Rotate container approx 1/10 turn as shown turn to secure locks on adaptor.

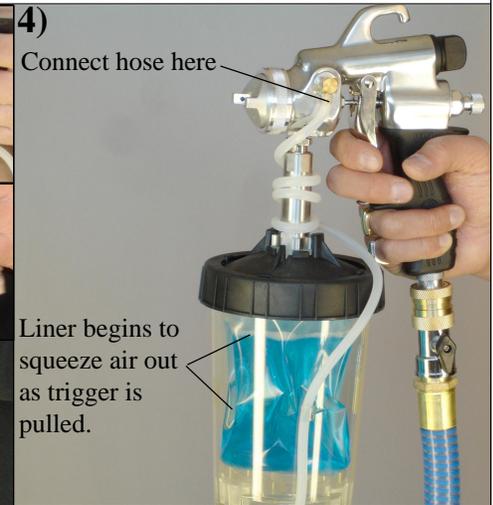


Connect pressure tube to elbow on side of gun as shown. The container requires this pressure to properly deliver material at the nozzle.



Turn on the turbine unit per instructions in the manual. Trigger gun and spray until air is removed from liner as indicated by a steady spray pattern. Adjust gun as required per manual.

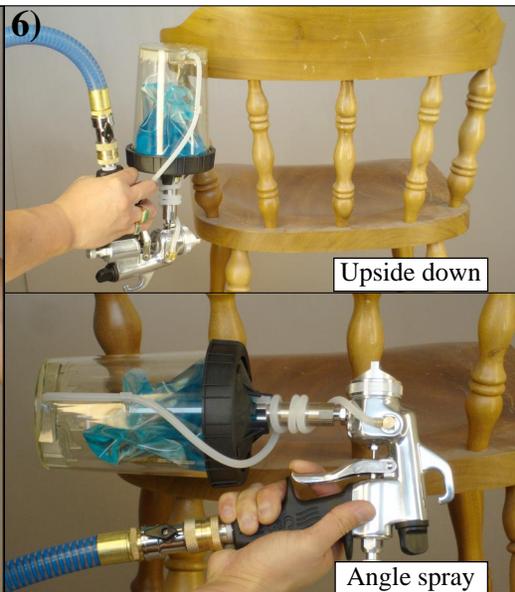

The inner liner collapses as paint is used, allowing you to spray on angles or even upside down! To refill container, turn off turbine or flow control valve, then follow steps 2 to 5 as required.

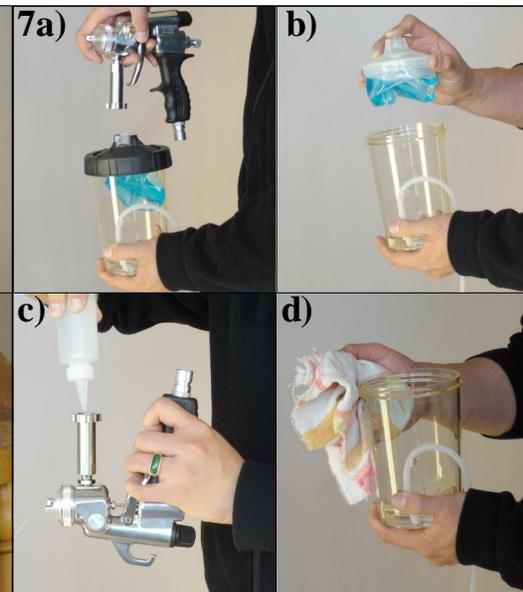

At end of work, turn off unit and remove container assy. Lid/liner can be disposed of, or gently cleaned. Flush some appropriate solvent through the gun and adaptor. Do not soak the hard shell in solvent, wipe clean only.



Spare lid/liner assemblies can be pre-filled with other colors, thinner etc for extra convenience and quick changes on the job.

Replacement Parts	
Liner w/lid, 950 mL	L034-311
Adaptor #18	L034-320
Hard Shell cup assy	L034-304

LEMMER
Lemmer Spray Systems Ltd.
4824-12th Street N.E. Calgary, AB, Canada. T2E 4R4
tel: (403) 250-7735 • fax: (403) 291-9095 • lemmer.com