


AU-100 Automatic Air Gun

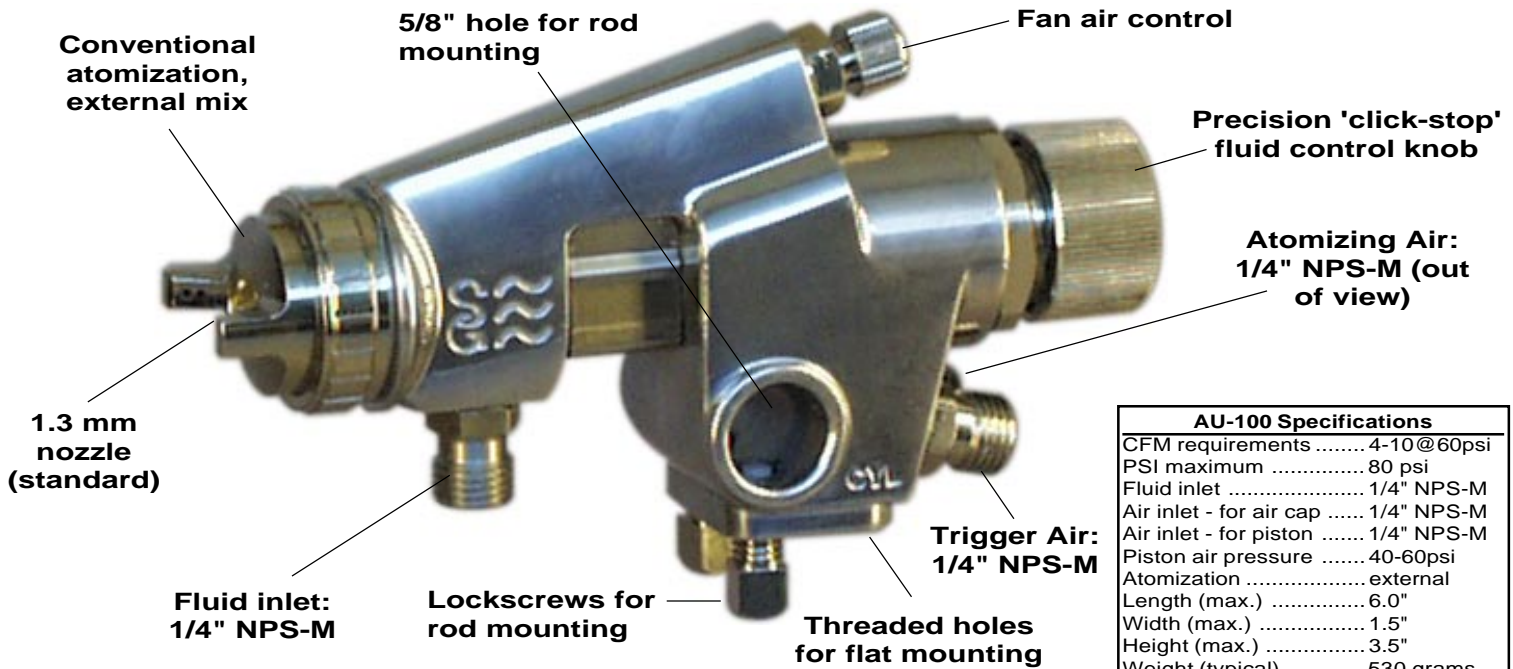

AU-100 Specifications	
CFM requirements 4-10@60psi
PSI maximum 80 psi
Fluid inlet 1/4" NPS-M
Air inlet - for air cap 1/4" NPS-M
Air inlet - for piston 1/4" NPS-M
Piston air pressure 40-60psi
Atomization external
Length (max.) 6.0"
Width (max.) 1.5"
Height (max.) 3.5"
Weight (typical) 530 grams
Wetted parts SS/Tef/ Brass
Order number (1.3mm) L015-096

L015-096 AU-100 conventional automatic spray gun

AU-100 Automatic Air Gun

is designed for small to medium sized industries. This top quality gun has precision adjustments that allow excellent control of the spray pattern. Fan width is adjusted at the top of gun and material flow is controlled at the back with a convenient 'click-stop' knob. The fluid nozzle and internal fluid passages are made of stainless steel for maximum longevity. Materials which can be sprayed include varnish, urethane, lacquer, automotive paint, epoxy, enamel, stain, latex, oil base, etc. The AU-100 is supplied with a 1.3 mm general purpose nozzle, sizes 0.8mm to 2.0mm are available upon request. Please contact your nearest distributor or Lemmer office for more details.

System accessories



Transfer Pumps



Stainless Pots



Hose and Fittings

Distributed by:

LEMMER

Lemmer Spray Systems Ltd.
 4624-12th Street N.E. Calgary, AB, Canada. T2E 4R4
 tel: (403) 250-7735 • fax: (403) 291-9095 • lemmer.com

Sales and Service Centres Across Canada. Feb-2010

- VANCOUVER**
 tel: (604) 430-3216
 fax: (604) 430-8017
- CALGARY**
 tel: (403) 250-7735
 fax: (403) 291-9095
- EDMONTON**
 tel: (780) 486-3674
 fax: (780) 444-2498
- WINNIPEG**
 tel: (204) 633-3117
 fax: (204) 694-4763
- TORONTO**
 tel: (905) 673-1555
 fax: (905) 673-3201
- MONTRÉAL**
 tel: (450) 681-8220
 fax: (450) 681-4914