


Wall Mounted Air-Airless



3033 wall-mount system, order numberL011-038

- 1) GM3600 gun: 3600 psi maximum fluid, 115 psi maximum air, stainless steel & tungsten fluid path.
- 2) Premium quality Wiwa 3033 pneumatic pump: 33:1 ratio, 3.0 ltr/min, self adjusting packings. 2 year labour warranty for pump repairs. *
- 3) Dual regulators with gauges to accurately control fluid and air pressure.
- 4) Nylon suction system with lined hose to eliminate corrosion issues in catalyzed coatings.
- 5) System bolts on booth or shop wall to save space.

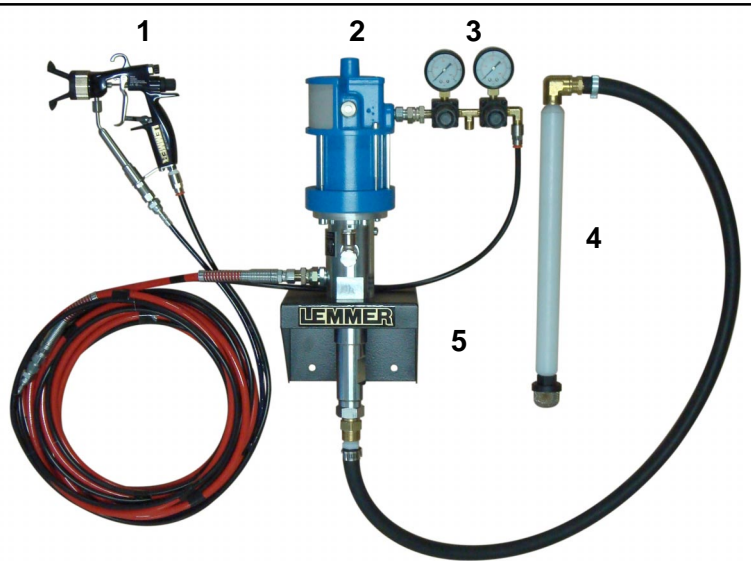

GM3600 Features

- 1) Standard tip for super crisp shutoff. Unique design can be reverse-installed for easy cleaning.
- 2) Air control fine tunes atomization and fan width.
- 3) This top of the line gun has a very light trigger pull.
- 4) Standard contractor gun filter for easy service.

Distributed by:

3033 Specifications

Packings	Teflon/Leather
Pump type	double action
Ratio	33:1
Air input pressure	15-125 psi
Max sys pressure	3300 psi
Free flow volume	0.8 gpm
Air consumption	2 - 7 cfm

GM3600 Specifications

Body	forged anodized
Maximum fluid pressure	3600 psi
Wetted parts	SS, TC, Tef
Tip supplied	13/40
Trigger	formed steel
Air cap	aluminium
Weight	19 ounces
Air consumption	5 - 15 cfm

Specifications: 3033 air-airless system

Max air input pressure	115 psi
Air use, typical	7-10 cfm
Suction hose length	4 ft x 1/2" ID, nylon lined
Fluid/air hose, supplied	28ft. (3'x1/8" whip incl.)
Shipping size	25"L x 15"W x 12"H
Shipping weight	35 lbs
Order number	L011-038

System Accessories

Return line kit	L298-425
Multi-pail suction system	L277-101
(adaptor fitting for above)	L035-513
H.P. filter w/ gauge	L298-251
1/3HP agitator lid system	L298-601

* 2 year labour warranty details:

- Limited time offer. Applies only to 3033 pump in system pn# L011-038 purchased between March 15 and December 31 of 2010.
- Does not cover repairs needed due to abuse, neglect, lack of cleaning or corrosion. Free labour does not include general clean-up.
- Does not include parts.
- This offer is non-transferrable. Valid only to original owner.
- Unit must be registered with Lemmer head office within 60 days of purchase using supplied application form via mail or fax. All forms submitted must include a copy of original sales invoice with legible date, company name and valid serial numbers.
- All free labour repairs must be done at a Lemmer office location.

This commercial duty wall mounted system uses a combination of airless fluid pressure (500 - 3300 psi) and low atomizing air pressure (5 - 50 psi) to give the very best of both air and airless technologies. You benefit by getting fast production speeds with top quality finishes! Air-airless systems also have the advantage of pumping from the original container and being simple to clean. Our high quality system features the Swiss made GM3600 gun for ultimate reliability. This compact gun has a soft trigger-pull to reduce operator fatigue, and is lightweight and easy to maneuver.

How does air assist work? The paint, lacquer, varnish or other coating is pumped from the original container to an airless tip at low pressure (typically 500 to 800 psi). This low pressure creates a softer spray pattern with little overspray, resulting in lower paint consumption. By adding a small amount of low pressure compressed air to complete the atomization process, air-airless greatly improves control and allows some adjustment of the spray pattern shape and size to achieve optimal atomization.

The result is a superior finish applied with high efficiency and minimal overspray,

FEATURES

- Soft spray pattern with low bounceback
- Reduced overspray with increased control
- Premium quality Wiwa pump with 2 year warranty on repair labour!*
- Gun is lightweight and comfortable
- Flexible suction draws from original pail
- System is easy to clean and maintain
- Handles low to medium viscosity materials
- Versatile - sprays a wide variety of material on a wide variety of surfaces
- Supported by Lemmer; parts and service across Canada for over 40 years

APPLICATIONS

- Stains, Solutions, Varnishes, Primers, Lacquers, Catalyzed Urethane
- Fine wood furniture and cabinetry
- Metal furniture, doors, cabinets, lockers
- Trucks, Cars, Motor homes, Buses - manufacturing and repainting
- Industrial and farm equipment
- Machinery and HVAC manufacturing
- Aircraft
- Ships and boats

BENEFITS

- Reduced material use means less cost
- Reduced emissions help meet government regs.
- Reduced overspray = less booth maintenance
- Cleaner work environment
- Increased productivity

LEMMER

Sales and Service Centers Across Canada. Mar-2010

VANCOUVER • CALGARY • EDMONTON • WINNIPEG • TORONTO • MONTRÉAL
 tel: (604) 430-3216 tel: (403) 250-7735 tel: (780) 486-3674 tel: (204) 633-3117 tel: (905) 673-1555 tel: (450) 681-8220
 fax: (604) 430-8017 fax: (403) 291-9095 fax: (780) 444-2498 fax: (204) 694-4763 fax: (905) 673-3201 fax: (450) 681-4914