


# A-910 Air Spray Gun



## A-910 Professional air gun:

The A-910 conventional spray gun is designed for furniture fine finishing, auto body shops, metal fabrication shops, contractors, and hobbyists. The metal gun is durable and has a large pot opening for easy cleaning. Spray fan width control is adjusted at the top back of gun, horizontal and vertical pattern is controlled at the air cap, and material flow is controlled at the back of the gun. Materials which can be sprayed include varnish, urethane, lacquer, automotive paint, epoxy, enamel, stain, latex, oil base, and heavier exotic coatings when using the larger nozzle set. The suction feed gun comes with a 1 quart container, and can also be used with an optional 2 quart or 2.25 gallon remote pressure pot. The fluid needle and seat are made of stainless steel, and the entire gun can be placed in a gun cleaning cabinet. The suction gun is supplied with a 1.8 mm general purpose nozzle for thin materials such as varnish, stain, and enamels (latex and oil base require some extra thinning). Gravity and pressure feed guns are supplied with a 1.4mm nozzle. Other sizes available separately.

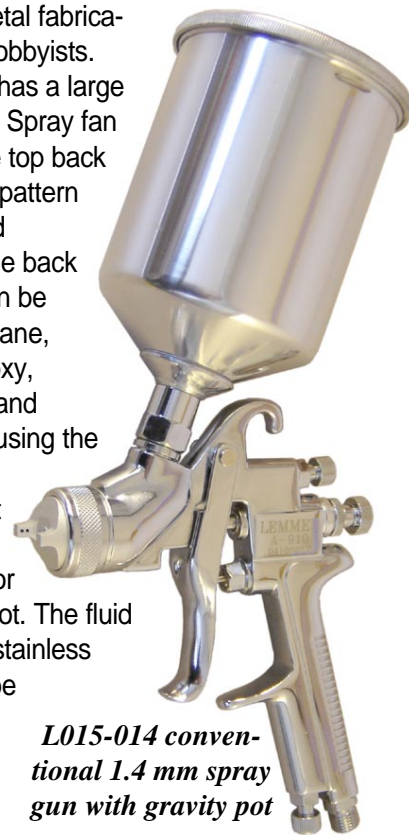

L015-014 conventional 1.4 mm spray gun with gravity pot

L015-012 conventional 1.8 spray gun with suction pot (shown)  
L015-013 pressure feed 1.4 mm version (without container)

### Nozzle kits:

1.1 needle/seat/cap kit .....	L015-850
1.4 needle/seat/cap kit .....	L015-851
1.8 needle/seat/cap kit .....	L015-854
2.0 needle/seat/cap kit .....	L015-852
2.5 needle/seat/cap kit .....	L015-853

### Nozzle chart

Material	1.1 mm	1.4 mm	1.8 mm	2.0 mm	2.5mm
clear finishes (up to 20 sec)	best	ok	no	no	no
colour finishes (20-40 sec.)	ok	best	ok	ok	no
multicolour & heavy latex (40 + sec.)	no	no	ok	best	best

Distributed by:

### Applications:

- Furniture finishing
- Automotive finishing
- Industrial coatings
- Aircraft refinishing

### Features:

- Full controls
- All metal gun body
- Easy to use
- Easy to clean



Typical remote system shown here with 2.25 gallon tank and 15' hoses.

### A-910 Specifications

CFM requirements .....	4-10 @ 60psi
PSI maximum .....	80 psi
Fluid inlet .....	3/8" npt
Air inlet .....	1/4" npt
Container size .....	1 quart
Anti-drip vent .....	internal
Atomization .....	external
Shipping size (inch) .....	L 9 x W 6 x H 5
Shipping weight .....	3 lbs (1.3kg)
Order number, suction (1.8 mm) ..	L015-012
Order number, press.(1.4 mm) ...	L015-013
Order number, gravity (1.4 mm) ..	L015-014

### Lemmer Spray Systems Ltd.

4624-12th Street N.E. Calgary, AB, Canada. T2E 4R4  
tel: (403) 250-7735 • fax: (403) 291-9095 • lemmer.com

Sales and Service Centres Across Canada. Apr-2011

**VANCOUVER**  
tel: (604) 430-3216  
fax: (604) 430-8017

• **CALGARY**  
tel: (403) 250-7735  
fax: (403) 291-9095

• **EDMONTON**  
tel: (780) 486-3674  
fax: (780) 444-2498

• **TORONTO**  
tel: (905) 673-1555  
fax: (905) 673-3201

• **MONTRÉAL**  
tel: (450) 681-8220  
fax: (450) 681-4914